

INTRODUCING
THE
NAIL
ZONE


only from
Malarkey
Roofing Products®

The average house roof requires
7920 NAILS!





Think:
IS EVERY NAIL INSTALLED CORRECTLY?

MALARKEY ENGINEERED SHINGLE DESIGN

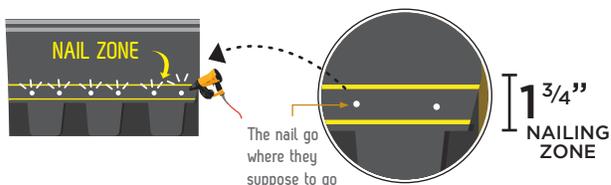

THE DIFFERENCES

STANDARD SHINGLE DESIGN

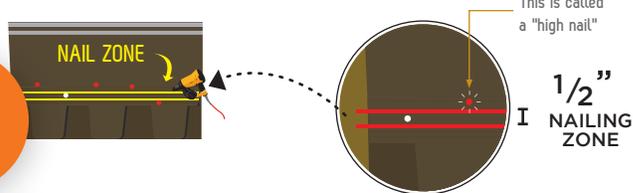

Allows for faster water flow, by reducing dips caused by the nail. This also makes it easy to hit **BOTH** layers every time.

TAPERED BACKING SHIM

Standard laminate shingles when high nailed, create a trough, where water flow is restricted. This causes shingles to wear out faster!



- ✓ Faster Installation
- ✓ More accurate
- ✓ More Waterproof

INSTALLATION

- ✗ Slower to install
- ✗ Increased chances of "high nails"
- ✗ Decreased Shingle Life

DOUBLE RAIN SEAL


2 Layers of Sticky Waterproof tar seal strips seal in all nail holes!

DOUBLE RAIN SEAL PROTECTION


Nail must be driven through sticky tar seal or leaks can form.

SINGLE RAIN SEAL

Increased wind resistance.



THE RESULT



If not installed correctly, shingles could flap in the wind, stretching, creating loose nail holes, and eventually blowing off the roof.



Malarkey laminate shingles are manufactured with The Zone® patented nailing area, which is over **three times larger than other laminate shingles** and dramatically improves correct fastener placement.



SARGEANT'S ROOFING
YOUR HOMES BEST LINE OF DEFENCE



www.SargeantsRoofing.com



780-905-1121